


# SUPER STAR<sup>1.2</sup> MODEL 1275

## DIMENSIONS

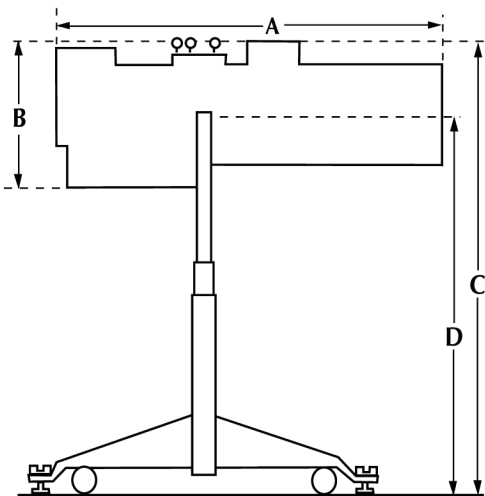

- A. Head length - 48" (121.9cm)**
- \*B. Head height - 19 1/2" (49.5cm)**
- \*C. Overall height with base 57 1/2" (146.5cm)**
- \*D. Height of pivot - 48 1/2" (123.2cm)**

\*Additional upward height adjustment of 13" (33.2cm)

- **Width of base- 34" (86.4cm)**
- **Maximum width of head - 17" (43.2cm)**
- **Head weight - 86 lbs. (39.0 Kg)**
- **Base weight - 41 lbs. (18.6 Kg)**
- **Power supply weight - 52 lbs. (23.59 Kg)**

## ARCHITECTS' & ENGINEERS' SPECIFICATIONS

The luminaire shall be a 1200 watt follow spotlight designed only for a 1200-HB metal halide lamp. A single lever variable focus optical system using a galvanized steel cable linkage shall be employed; ribbons shall not be acceptable. A gate assembly consisting of a nichrome steel heavy duty iris, paired stainless steel trim shutters, gobo slot and heavy duty fading shutter shall be provided. Rapid focus shall be via an external knob. Spotlights requiring more than two rotations of the focus knob are not rapid focus and shall not be acceptable. Optical grade white water plate lenses shall be used. The spotlight housing shall be extruded aluminum and sheet steel finished in black and gray epoxy powder-coated wrinkle finish. A six color automatic self-canceling color boomerang shall be provided. Field control and "x" and "y" axes shall be external; internal controls shall not be acceptable. Lamp mounting shall be of the shock mount type. A safety switch shall be fitted to the lamp house top. Power to the spotlight shall be controlled via two pushbuttons mounted in the spotlight head. Removal of the lamphouse top or loss of power shall render the spotlight in the "off" mode. Replacement of the top or reinstating power will not unexpectedly relight the lamp.

To restrike the lamp will require a momentary push of the "on" button. The spotlight is supplied with a faceted borosilicate reflector with dichroic coating. An operations unit containing the unit's electronics is quickly accessible from the bottom of the spotlight head. A quick release multipin connector shall be mounted on the bottom of the spotlight for connection to the remote ballast unit. The ballast chassis shall have a 20 amp. Circuit breaker, be constructed of extruded aluminum with stamped side and end parts, and may be operated in an upright or horizontal position or stacked in multiples. The unit shall include an elapsed time meter. The yoke shall be part of the head and allow for a maximum tilt of 55 degrees below horizontal and 50 degrees above horizontal. A stable three legged; folding base with locking casters and leveling jacks shall be provided. The spotlight shall be fan cooled. Housing dimensions shall not exceed 48" (1219.2mm) (L) x 17"(431.8mm) (W) x 19.5"(495.3mm) (H) including all controls. Net weight of the spotlight head shall not exceed 86 lbs (39.0 Kg) and 41 lbs (18.6 Kg) for the base. Current draw at 120 VAC shall not exceed 15 amps. Photometric data shall conform to the table provided. The luminaire shall be a Lycian Stage Lighting SuperStar 1.2 Model 1275.

## ORDERING CODE

■ 1275	SuperStar 1.2
■ 1275/UT	SuperStar 1.2 Universal Power Supply Tray

Note: "UT" indicates a universal power supply that can be field adjusted for 100V, 220V, 240V 50Hz. or 60Hz.

## PHOTOMETRICS

THROW	Feet / Meters	100'/30.5M	150'/45.7M	200'/61.0M	250'/76.2M
<b>MIN. SPOT (w/IRIS)</b>					
Footcandles Lux		304 3272.2	135 1453.1	76 818.1	49 527.4
	Diameter	20" 50.8	30" 76.2	40" 101.6	50" 127.0
<b>SMALL SPOT</b>					
Footcandles Lux		304 3272.2	135 1453.1	76 818.1	49 527.4
	Diameter	9.0' 2.74	13.5' 4.1	18.0' 5.5	22.5' 6.9
<b>MAX. FLOOD</b>					
Footcandles Lux		72 775	32 344.4	18 193.8	11 118.4
	Diameter	18' 5.5	28' 8.5'	37' 11.3	46' 14.0