

# ZOT

ZOT 12i  
ZOT 5i  
ZOT 7i  
ZOT 15

*An American made line of  
versatile, affordable  
followspots*



#926 Ballast for 15  
(internally selectable  
1200-1500 watts)

## FEATURES

- Choose From 1200 Watt Tungsten & 575, 700, & 1500 Watt Arc
- Fast Lamp Change with Fast-Fit/Lok-It Style Lamps (not included)
- Internal 5- Color Boomerang Rear Iris Control
- Fine Focus to Soften & Harden Edge
- Top Mounted Fader Control
- Includes 3 Legged Base With Casters
- 2 Year Limited Warranty

## PRICED LIKE AN IMPORT...BRIGHT LIKE A LYCIAN

A VERSATILE LINE THAT CAN BE USED IN CLUBS, SCHOOLS, CRUISE SHIPS,  
THEATRES, SMALL ARENAS, ETC.  
RUGGED, RELIABLE, AND LYCIAN BRIGHT  
BACKED BY THE LYCIAN LIMITED 2 YEAR WARRANTY



**Made in USA**


www.lycian.com • Tel. +1 (845) 469-2285 • Fax +1 (845) 469-5355



**LYCIAN**  
STAGE LIGHTING

**LYCIAN STAGE LIGHTING • PO BOX 214 • SUGAR LOAF, NY • 10981 • USA**

The luminaire is available in 4 versions- ZOT 12, a 1200 watt tungsten, ZOT 5HPi, a 575 watt arc, ZOT 7HPi, a 700 watt arc and ZOT 15, a 1500 watt arc. (ballast internally selectable from 1.2K-1.5K) Spot diameter shall be controlled via a rear handle iris control linked to a nichrome steel iris. The unit shall include an external fine focus control, top operated fader and a top mounted 5- color, push-pull boomerang. A resiliently mounted, dichroic glass reflector and optical quality glass lenses shall complete the optical system. Lamping shall be through a rear door. Lamping utilizes a "bayonet" style lamp/socket combination. The lamp is inserted through the socket and with a slight twist, locks in place. The ZOT, 5HPi, 7HPi, 12, shall have self-contained power supplies with an ON/OFF switch. ZOT 5 & 7 also include a circuit breaker. An 11 foot line cord, terminated in a NEMA 5-15P connector is also supplied. The ZOT 15 shall have an external power supply connected to the spotlight head via a 6 foot flexible cord terminated in a head mounted twist- lock type connector. The ON/ OFF switch and circuit breaker shall be power supply mounted. The external power supply shall have a 10 foot line cord terminated in a NEMA 5-15P connector. A three legged fixed base will be standard. Units shall be cooled by low volume (70 cfm maximum) muffin fans. Units using high volume fans shall not be acceptable. Housing shall be constructed of extruded aluminum and cold rolled steel and be powder coated using black and gold powder. Unit heads (all units) shall measure 42-1/2" long x 15" wide and 13" high including all controls. LYCIAN STAGE LIGHTING, ZOT 5, ZOT 7, ZOT 12, ZOT 15 shall be specified. Units are manufactured in the United States of America

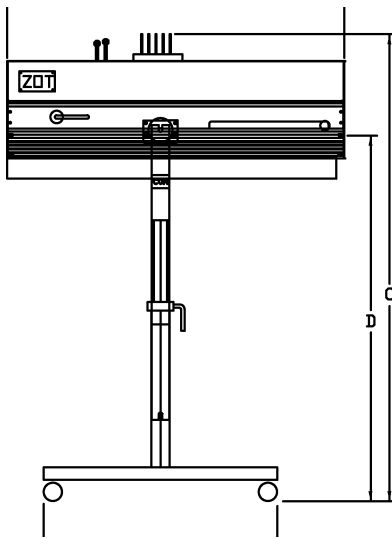

- A. Head Length- 42-1/4"
- B. Head Height- 13"
- C. Overall Height with Base- 46-1/2"

\* Additional upward height adjustment 13"

\*D. Height of Pivot- 39-3/4"

E. Base Width- 40"

Maximun Width of Head- 14"

**ORDER CODE**

- ZOT 12 1200W Tungsten Followspot
- ZOT 5 575W ARC Followspot
- ZOT 7 700W ARC Followspot
- ZOT 15 1500W ARC Followspot

Followspots inc. Head, Yoke, & Base  
Specifications subject to change

7-19 °

**PHOTOMETRICS**

Distance	30 ft.	60ft	80 ft.	100 ft.	125 ft
Distance	9 meters	18 meters	25 meters	30 meters	38 meters
Spot Dia. Feet	3' 8"	7' 3"	9' 6"	12'	15'
Spot Dia. Meters	1.14	2.2	2.9	3.7	4.6
Flood Dia. Feet	10	19' 6"	26	32	40
Flood Dia. Meters	3	5.9	7.9	9.8	12.2

ZOT 12i

FC Spot	700	175	98	63	40
Lux Spot	7535	1884	1055	678	431
FC Flood	123	31	17		
Lux Flood	1324	334	183		

ZOT 5i

FC Spot	1241	309	174	111	71
Lux Spot	13,347	3326	1873	1195	764
FC Flood	208	52	29		
Lux Flood	2239	560	312		

ZOT 7i

FC Spot	2000	499	281	180	115
Lux Spot	16,404	4101	3025	1938	1238
FC Flood	306	76	43		
Lux Flood	3294	818	463		

ZOT 15

FC Spot	3140	785	442	283	181
Lux Spot	33,799	8450	4758	2530	1625
FC Flood	544	136	77	49	31
Lux Flood	5856	1464	829	527	334



**LYCIAN**  
STAGE LIGHTING

PO Box 214, 1144 Kings Highway  
Sugar Loaf, NY 10981 USA  
Tel: +1 (845) 469-2285